



If you enjoy soaking in a warm, soothing tub surrounded by gently moving water, or if you prefer an invigorating foot and back massage, the Elara™ tub is right for you.

#### **FEATURES:**

- 4 fully adjustable TheraPro® jets
- 8 to 12 AccuPro™ back and foot jets
- Chromatherapy<sup>™</sup> lighting system capable of 256 colors
- Available with Illumatherapy™ lighting system
- Flexible drop-in or undermount installation options
- · Low-profile deck
- RapidHeat<sup>™</sup> inline heater
- Multi-speed motor
- Wave Pulse<sup>™</sup> system
- All-in-one electronic control panel
- **PrO**<sup>™</sup> Cleansing System

# Elara<sup>™</sup> 6042 WHIRLPOOL **BATH** with **CHROMATHERAPY**

MODEL NUMBER: EE80 (Left-hand) EE85 (Right-hand)

**EXTERIOR DIMENSIONS:** 60" long x 42" wide x 23½" high

# OF JETS/TYPE OF JETS: 4 TheraPro™ 6 Back Jets

2 Foot Jets

**OPERATING GALLONS:** 88 gallons

# Elara<sup>™</sup> 6042 WHIRLPOOL **BATH** with **ILLUMATHERAPY™**

MODEL NUMBER: EE90 (Left-hand) EE95 (Right-hand)

**EXTERIOR DIMENSIONS:** 60" long x 42" wide x 231/2" high

# OF JETS/TYPE OF JETS:

4 TheraPro™

8 Back Jets

4 Foot Jets

**OPERATING GALLONS:** 88 gallons





# **Elara**<sup>™</sup> 6042

# WHIRLPOOL BATH with CHROMATHERAPY

EE80 Elara™ 6042 Whirlpool Bath, Left Hand
EE85 Elara™ 6042 Whirlpool Bath, Right Hand

# Elara<sup>™</sup> 6042 WHIRLPOOL BATH WITH ILLUMATHERAPY™

EE90 Elara™ 6042 Whirlpool Bath, Left Hand
EE95 Elara™ 6042 Whirlpool Bath, Right Hand

- Right and Left Hand Drain Location
- Accessories / Hardware:

TheraPro™ Jet Rings Kit: #D095 AccuPro™ 2 Jet Rings Kit: #P556\*

(\* 2 kits required for EE90 and EE95)

- Trim Kit Finishes Available:
  - (827) Chrome

(898) - Brushed Chrome


(815) - Satin Nickel

(829) - Bright Brass

(805) – Platinum

(826) - Brushed Nickel

(845) - Oil Rubbed Bronze



# Product Shown: Elara<sup>™</sup> 6042 Whirlpool Bath with Illumatherapy<sup>™</sup> Left Hand Model: EE90

#### **INSTALLATION NOTES**

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

# **Technical Specifications**

#### **DIMENSIONS**

60" L x 42" W x 23-1/2" H (1524) mm L x (1067) mm W x (597) mm H

#### DRAIN/OVERFLOW

A: 18-1/2" (470 mm) B: 10.6" (269 mm)

#### CUTOUT

58" x 40" & undermount template DQ50000

#### **TOTAL WEIGHT**

1126 lb. (511 kg) / 65 lb/ft<sup>2</sup> (319 kg/m<sup>2</sup>)

#### **OPERATING GALLONAGE**

88 U.S. Gal. (333 Liters) Min 83 U.S. Gal. (314 liters) Max 92 U.S. Gal. (348 liters)

#### **PRODUCT WEIGHT**

200 lb (91 kg)

# **SKIRT MOUNTING**

Not Available

## **ELECTRICAL SPECIFICATIONS**


Requires a dedicated GFCI protected separate circuit.


Motor/Pump: 120 VAC, 20 AMP, 60 Hz. RapidHeat<sup>TM</sup>: 120 VAC, 15 AMP, 60 Hz.

## **HEATER (STANDARD)**

Requires a dedicated GFCI protected separate circuit.

RapidHeat<sup>TM</sup>: P/N S750000

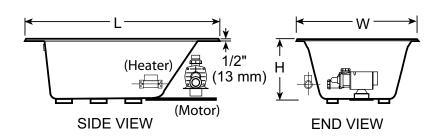



<sup>\*</sup> Measurements inside unit represent cutout in floor to allow for drain/overflow.